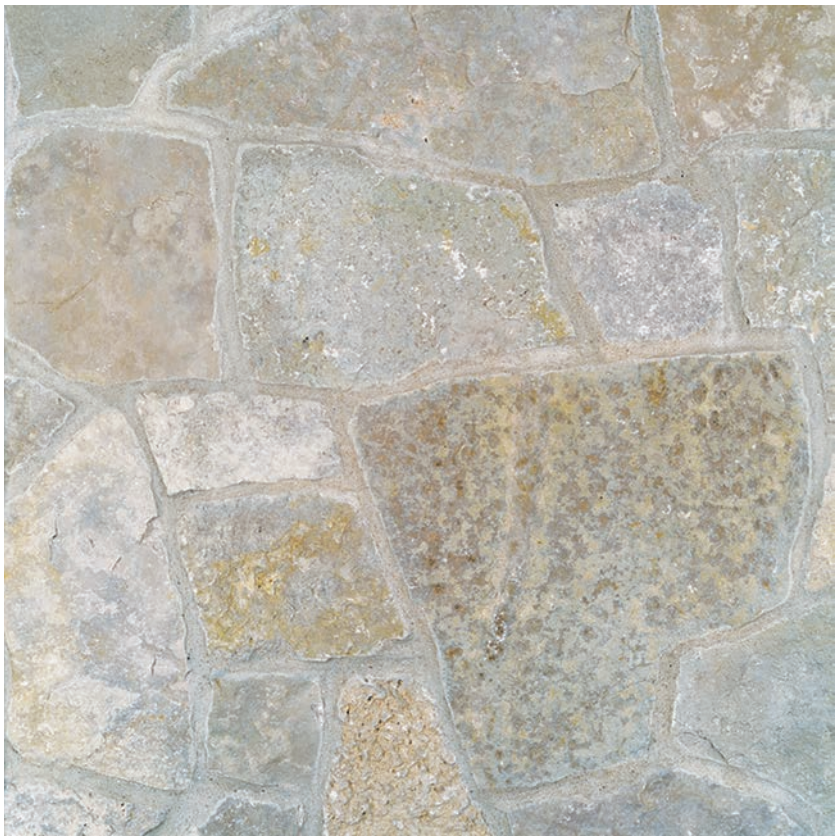

MOSAIC

FOND DU LAC WEBWALL

GEOLOGY: dolomitic limestone

BASIC USE
exterior walls of buildings and fireplaces
stone shall be mortared in

COLOR RANGE
gray, light gray, buff, and white

COLOR CONSISTENCY PER PALLET
somewhat consistent

WEIGHT CALCULATED IN INCHES
l x w x h / 1728 (inches cubed) x 170
= approx 170 pounds per cubic foot

PALLET
FULL VENEER: 4,000 pounds
THIN VENEER: 10-15 lbs/ft²; Qty Bx or Sm Bx
Qty Bx - 100 sq ft flats and 50 lineal ft corners
Sm Bx - (24) 8 sq ft flats (192 sq ft) and
(20) 8 lineal ft corners (160 lineal ft)

FULL VENEER

COMMON COVERAGE *Est.(can vary)

Standard Joint	Drystack	Overgrout
40 square feet / ton	30 ft²/ton	50 ft²/ton

FOND DU LAC WEBWALL

DIMENSIONS

US: inches (average)	METRIC: mm (average)
l: 3” to 16” dia.	l: 76 to 406 dia.
h: 3” to 16” dia.	h: 76 to 406 dia.
w: 3“ to 5” (4”)	w: 76 to 127 (101)

note: lengths and heights are irregular shapes
3 inches to 16 inches in diameter

TYPICAL PIECE
ends irregular;
natural split sides;
bedface face and back;
stone is random shapes

PART NUMBERS

FULL VENEER
part number: 1BSTBUE02017TN

THIN VENEER
qty bx flat: 1BTVBUE02017QB
sm bx flat: 1BTVBUE02017QB
qty bx corner: 1BTVBUE02528QB
sm bx corner: 1BTVBUE02530BX

THIN VENEER

COMMON COVERAGE PER BOX *Est.(can vary)

Standard Joint	Drystack	Overgrout
8 & 100 square feet	6 & 75 ft²	10 & 110 ft²

FOND DU LAC WEBWALL

DIMENSIONS

US: inches (average)	METRIC: mm (average)
l: 3” to 12” dia.	l: 76 to 304 dia.
h: 3” to 12” dia.	h: 76 to 304 dia.
w: 3/4“ to 1-1/4” (1”)	w: 19 to 31 (25)
corner return 3“ to 5”	cr: 76 to 127

note: lengths and heights are irregular shapes
3 inches to 12 inches in diameter

TYPICAL PIECE
ends irregular;
natural split sides;
bedface face and sawn back;
stone is random shapes

ASTM TESTING DATA

FOND DU LAC C97 water absorption—0.36%
FOND DU LAC C97 density—174.2 pcf
FOND DU LAC C99
modulus of rupture—1,470 psi
FOND DU LAC C170
compressive strength w/rift—29,040 psi
compressive strength across rift—34,240 psi
FOND DU LAC C880
flexural strength—1,740 psi