


FIELDLEDGE

FOND DU LAC HERITAGE BLEND

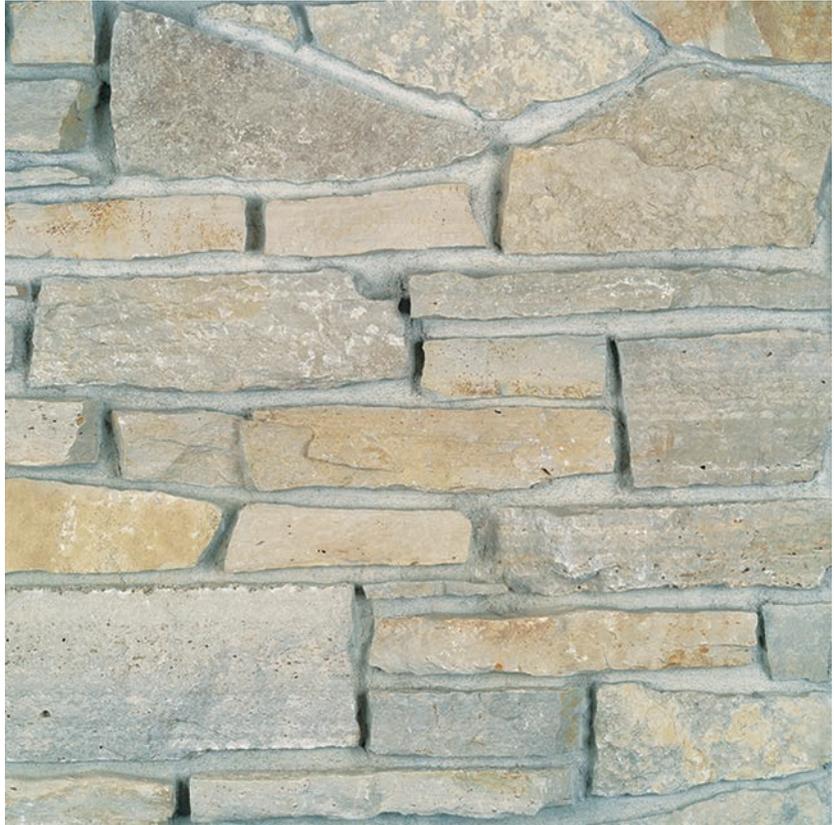

GEOLOGY: dolomitic limestone

BASIC USE

exterior walls of buildings and fireplaces
stone shall be mortared in

COLOR RANGE

light gray to white, brown,
buff, tan, and gold

COLOR CONSISTENCY PER PALLET

inconsistent

WEIGHT CALCULATED IN INCHES

l x w x h / 1728 (inches cubed) x 170
= approx 170 pounds per cubic foot

PALLET

FULL VENEER: 4,000 pounds
THIN VENEER: 10-15 lbs/ft²; Qty Bx or Sm Bx
Qty Bx - 100 sq ft flats and 50 lineal ft corners
Sm Bx - (24) 8 sq ft flats (192 sq ft) and
(20) 8 lineal ft corners (160 lineal ft)

FULL VENEER

COMMON COVERAGE ^{*Est.(can vary)}

Standard Joint	Drystack	Overgrout
40 square feet / ton	30 ft ² /ton	50 ft ² /ton

FOND DU LAC HERITAGE BLEND

DIMENSIONS

US: inches (average)	METRIC: mm (average)
l: 6" to 24"	l: 152 to 609
h: 2" to 12"	h: 50 to 304
w: 3" to 5" (4")	w: 76 to 127 (101)

note: lengths and heights can vary with
rough irregular shapes mixed in

TYPICAL PIECE

ends random; completely random
mix of Fond du Lac material;
rough-cut stone is a mixture of splitface,
natural splitface, and bedface;
stone is mixture of triangular, square,
rectangular, trapezoidal, and parallelogram
shapes

PART NUMBERS

FULL VENEER

part number: 1BSTBUE02016TN

THIN VENEER

qty bx flat: 1BTVBUE02016QB
sm bx flat: 1BTVBUE02016BX
qty bx corner: 1BTVBUE02516QB
sm bx corner: 1BTVBUE02516BX

THIN VENEER

COMMON COVERAGE PER BOX ^{*Est.(can vary)}

Standard Joint	Drystack	Overgrout
8 & 100 square feet	6 & 75 ft ²	10 & 110 ft ²

FOND DU LAC HERITAGE BLEND

DIMENSIONS

US: inches (average)	METRIC: mm (average)
l: 6" to 24"	l: 152 to 609
h: 2" to 12"	h: 50 to 304
w: 3/4" to 1-1/4" (1")	w: 19 to 31 (25)

corner return 3" to 5" cr: 76 to 127
note: lengths and heights can vary with
rough irregular shapes mixed in

TYPICAL PIECE

ends random; completely random
mix of Fond du Lac material;
rough-cut stone is a mixture of splitface,
natural splitface, and bedface;
stone is mixture of triangular, square,
rectangular, trapezoidal, and parallelogram
shapes; back of stone is sawn

ASTM TESTING DATA

FOND DU LAC C97 water absorption—0.36%
FOND DU LAC C97 density—174.2 pcf
FOND DU LAC C99
modulus of rupture—1,470 psi
FOND DU LAC C170
compressive strength w/rift—29,040 psi
compressive strength across rift—34,240 psi
FOND DU LAC C880
flexural strength—1,740 psi



www.buechelstone.com